


Flat PV Ribbon Wire Traverse Wound Spool Packaging Options


Number	d1	d2	d3	d4	L1	L2	L3	Capacity	Mat.	Notes
	mm	mm	mm	mm	mm	mm	mm	kg		
DIN	100	63	16	7	100	80	20	2.0	ABS	1, 2
DIN	125	80	16	7	125	100	20	4.0	ABS	1, 2
DIN	160	100	22	13	160	128	32	8.0	ABS	1, 2, 3
DIN	200	125	22	13	200	160	32	15.0	ABS	1, 2, 3
DIN	250	160	22	13	200	160	32	20.0	ABS	1, 2, 3
6 x 4	152	102	15.9	10.2	122	102	19	4.5	ABS	2

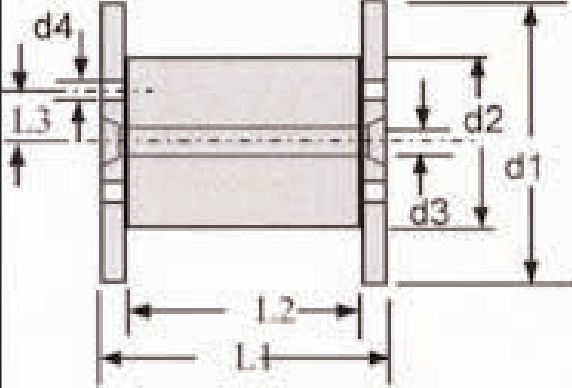

Notes:

1. Meets ICE 264-2-1 (DIN 46 300).
2. Returnable packaging, no deposit required.
3. Available with 16mm bore adapters.

10S

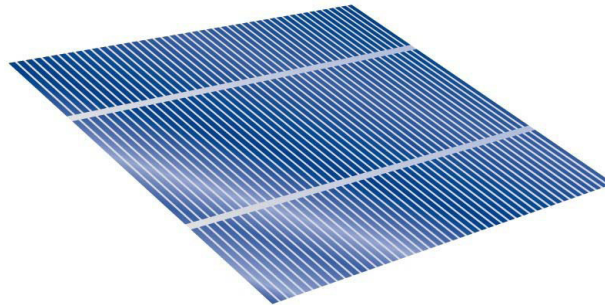

5H
10H
20H
30H

